


DI5009

DIA3010-ZPKG/US-100-DPS

Evaluation systems, power supplies

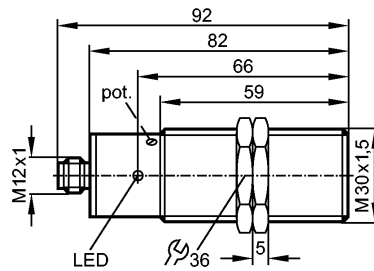

Made in Germany



Product characteristics

Compact speed monitor M30
DIA
M30 x 1.5
Connector
Inductive sensor
Sensing range 10 mm [f]
flush mountable

Application

Application	simple evaluation of rotating and linear movement with regard to underspeed; blocking
Switching function	output is switched during the start-up delay and if (f actual) is greater than (f preset)
Electrical design	DC PNP
Switching output	normally open

Electrical data

Nominal voltage [V]	10...36 DC
Current consumption [mA]	< 15
Reverse polarity protection	yes

Outputs

Transistor	
Current rating (continuous) [mA]	250
Current rating (peak) [mA]	250
Voltage drop [V]	< 2.5
Short-circuit proof	yes
Overload protection	yes

Range

Sensing range [mm]	10
Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.5 / Al approx. 0.4 / Cu approx. 0.3

Measuring / setting range

Setting range [pulses/min.]	5...300
Adjustment of the switch point	multiturn potentiometer
Hysteresis [% of Sp]	10
Start-up delay [s]	15

Reaction times

Damping frequency (max.) [pulses/min]	15000
---------------------------------------	-------

DI5009

DIA3010-ZPKG/US-100-DPS

Evaluation systems, power supplies

Environment

Ambient temperature	[°C]	-25...80
Protection		IP 67

Safety classification

MTTF	[a]	898
------	-----	-----

Mechanical data

Mounting		flush mountable
Housing materials		Brass special coating; PBT (Pocan)
Weight	[kg]	0.186


Displays / operating elements

Input pulses	LED	yellow
Output status indication	LED	green

Electrical connection

Connection		M12 connector; Gold-plated contacts
------------	--	-------------------------------------

Wiring



Remarks

Pack quantity	[piece]	1
---------------	---------	---