


KI5083

KI-3200NFPKGP2T/US

Capacitive sensors

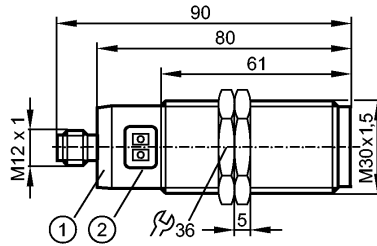

- 1: LED ring
- 2: Programming buttons

Made in Germany



Product characteristics

Capacitive sensor
Plastic thread M30 x 1.5
Connector
Teach function
Electronic lock
Sensing range 20 mm; [nf] non-flush mountable

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	< 20
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	normally open / closed programmable
Voltage drop [V]	< 2.5
Current rating [mA]	200
Short-circuit protection	yes
Overload protection	yes
Switching frequency [Hz]	10

Range

Sensing range [mm]	20
--------------------	----

Accuracy / deviations

Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-20...20


Interfaces

IO-Link Device	
Transfer type	COM1 (4.8 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9 CDV
IO-Link Device ID	388d / 000184h
Profiles	Smart Sensor
SIO mode	yes
Min. process cycle time [ms]	101

KI5083

KI-3200NFPKGP2T/US

Capacitive sensors

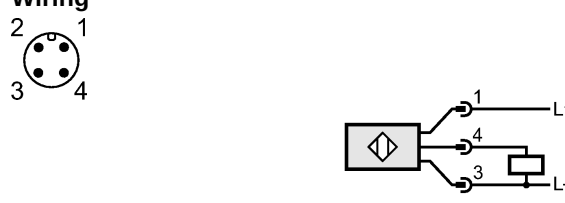Environment		
Ambient temperature	[°C]	-25...80, temperature of the sensing face -25...110 °C
Protection		IP 65 / IP 67
Tests / approvals		
EMC		EN 61000-4-2 ESD: 8 kV AD EN 61000-4-3 HF radiated: 10 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 3 V EN 55011: class B
Vibration resistance		(10...55 Hz) / 1 mm amplitude, oscillation period 5 min., 30 min. per axis at resonance or 55 Hz EN 60068-2-6 Fc
Shock resistance		30 g 6 shocks / 11 ms half-sine (x,y,z) EN 60068-2-27 Ea
MTTF	[Years]	663
Mechanical data		
Mounting		non-flush mountable
Housing materials		housing: PBT; connector: PC; buttons: TPE-U
Weight	[kg]	0.116
Displays / operating elements		
Output status indication	LED	yellow
Electrical connection		
Connection		M12 connector
Wiring  <p>4: OUT / IO-Link</p>		
Accessories		
Accessories (included)		2 lock nuts
Remarks		
Pack quantity	[piece]	1