


TM4441

TM-150KFBR12- /US/

Temperature sensors

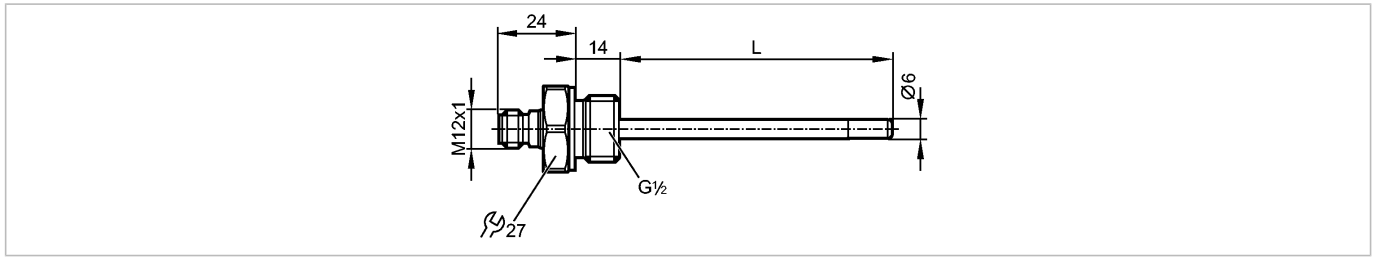

Made in Germany



Product characteristics

Temperature sensor for connection to a control monitor with a max. operating voltage of 32 V
Connector
Process connection: G ½
Installation length: 150 mm
Gold-plated contacts
Connection to control monitor TP / TR
Measuring range: -40...150 °C / -40...302 °F
Measuring element: 1 x Pt 100, to DIN EN 60751, class A

Application

Application	liquids and gases
Minimum installation depth [mm]	15

Electrical data

Connection to control monitor	TP / TR
Protection class	III

Measuring / setting range

Measuring range [°C/°F]	-40...150 / -40...302
-------------------------	-----------------------

Accuracy / deviations

Accuracy	± (0.15 K + 0.002 x t)
----------	--------------------------

Reaction times

Dynamic response T05 / T09 [s]	1 / 3 *)
--------------------------------	----------

Environment

Pressure rating [bar]	160
Ambient temperature [°C]	-25...80
Protection	IP 68 / IP 69K

Tests / approvals

Shock resistance	DIN EN 60068-2-2-27:	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6:	10 g (10...2000 Hz)
MTTF [Years]		22831

Mechanical data

Process connection	G ½
Materials (wetted parts)	stainless steel 316L / 1.4404; FPM (Viton)
Probe diameter [mm]	6
Probe length L [mm]	136
Installation length [mm]	150
Housing materials	stainless steel 316L / 1.4404
Weight [kg]	0.182

TM4441


TM-150KFBR12- /US/

Temperature sensors

Electrical connection

Connection	M12 connector; Gold-plated contacts
------------	-------------------------------------

Wiring



Remarks

Remarks	cULus - Class 2 source required *) according to DIN EN 60751 The values for accuracy apply to flowing water.
---------	--

Pack quantity	[piece]	1
---------------	---------	---